

iBEAM[®] iWitness[™] Construction Camera
INSTALLATION INSTRUCTIONS

Getting Started

Remove all components from shipping box.

Install the Camera

Attach the camera arm to the mounting surface (pole or wall) using the supplied hardware.

Attach camera enclosure to the camera arm.


Connect network cable to your modem.

Plug the camera enclosure into 120V AC power.

Configure your Network

Your network must be configured to allow outside traffic to the camera. The most common method for this is to use port forwarding on your network's router to forward all outside requests on port 80 to the camera's network IP address. See other side for the camera's network IP addresses.

iBEAM[®] iWitness[™] Construction Camera
INSTALLATION DIAGRAM

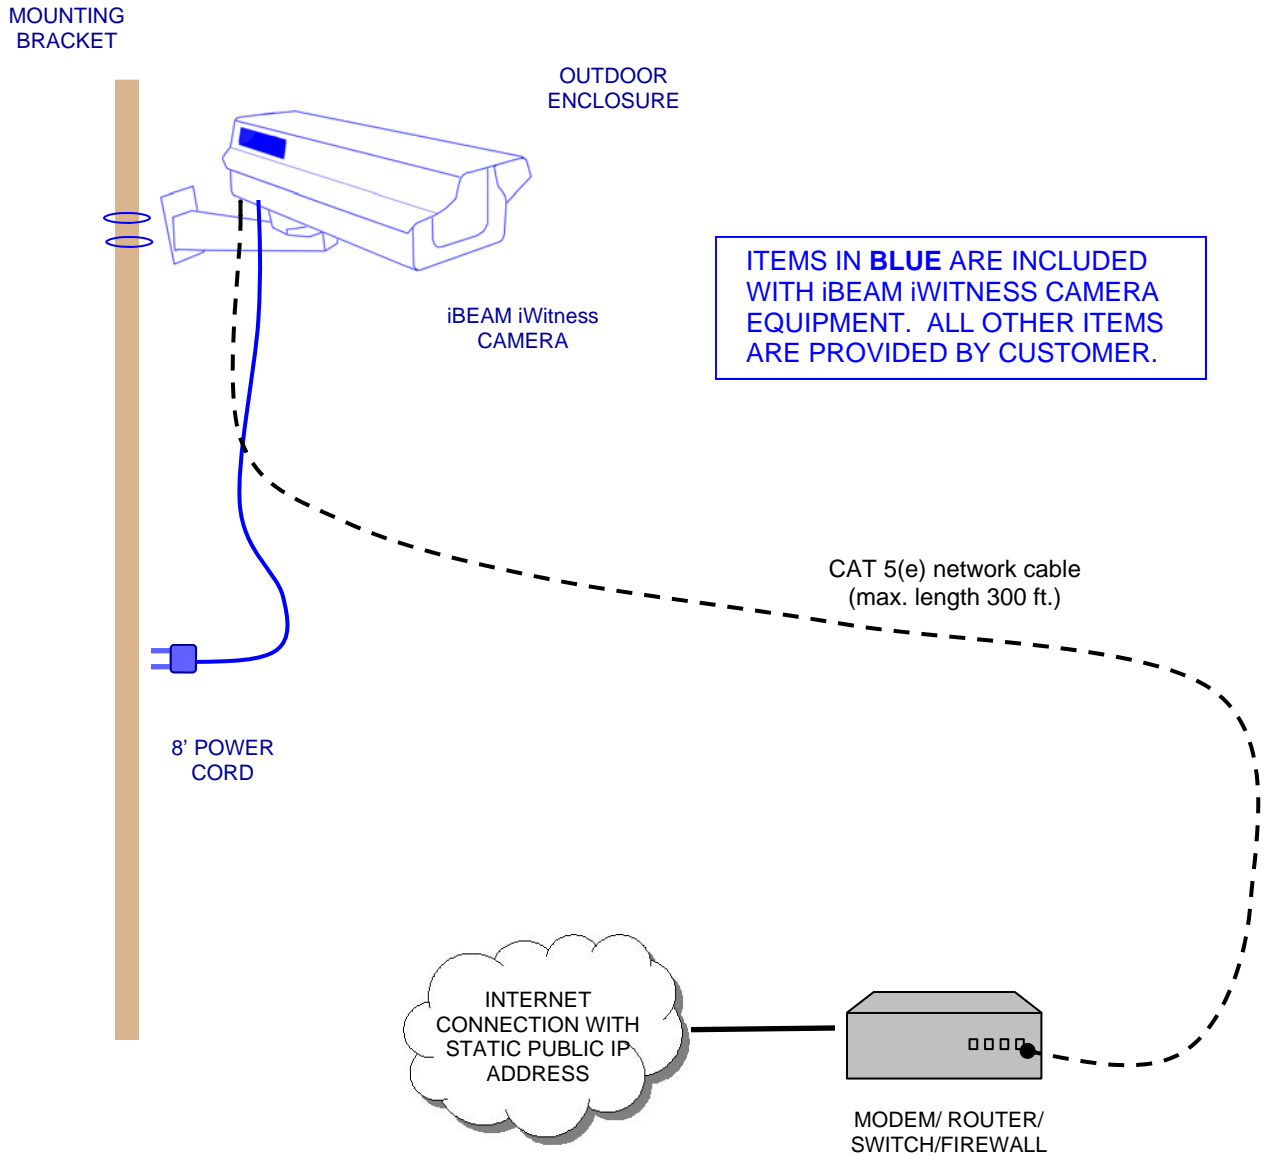

Your iBEAM iWitness Construction Camera system has been programmed with the IP addresses you provided:

iWitness Camera: _____

Your network administrator must configure your router to allow access to the camera at the IP address above.

**YOUR NETWORK MAY VARY. CONSULT YOUR NETWORK ADMINISTRATOR.