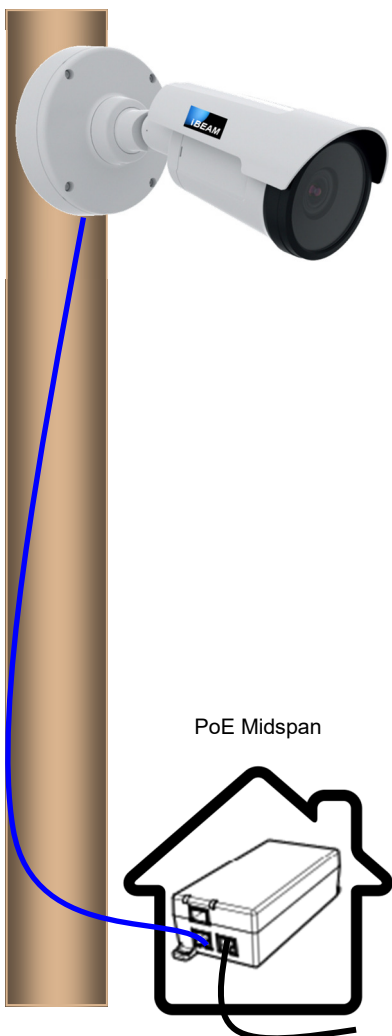


Installation Guide for all
iBEAM Fixed Cameras with Ethernet Communication

TEST YOUR CAMERA'S NETWORK SETTINGS BEFORE INSTALLING THE CAMERA:

- 
- 1 Connect the PoE Midspan to a power source near your network connection.
 - 2 Connect the *DATA IN* port on the PoE Midspan to your network using the provided CAT5(e) network cable.
 - 3 Connect the camera's network cable to the *DATA POWER OUT* port on the PoE Midspan.
 - 4 Verify your network's forwarding settings by trying to reach the camera at the Static WAN IP address your IT department provided to iBEAM on the New Project Setup Form.

CONTACT YOUR IT DEPARTMENT FOR HELP IF YOU CANNOT REACH THE CAMERA AS EXPECTED

AFTER YOU HAVE SUCCESSFULLY TESTED THE CAMERA'S NETWORK SETTINGS, PROCEED WITH INSTALLATION:



- 1 Disconnect the camera's network cable from the PoE Midspan.
- 2 Attach the camera to a pole or other mounting surface using the provided straps.
- 3 Reconnect the camera's network cable to the *DATA POWER OUT* port on the PoE Midspan.
- 4 After the camera has been mounted and plugged in for 15-20 minutes, the Primary Contact will receive an email* with information regarding how to view your camera.

***If the Primary Contact doesn't see this email from our Support Team, please reach out to them at 800.403.0688 ext. 2 and they can verify the system is online.**

The Support Team is available Monday through Friday 8:00 am - 5:00 pm Mountain Standard Time. When calling, if they're assisting another customer please leave a voicemail and they'll return your call as soon as possible.



Camera Pole Mount

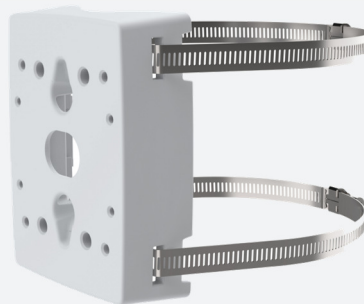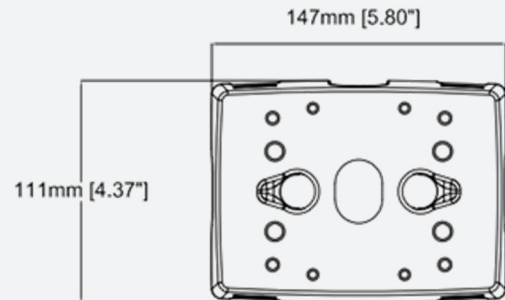

Camera pole mount (preassembled)

This installation guide applies to:

iBEAM Fixed 4K
iBEAM Fixed 4K Premier
iBEAM Fixed 8K Titan

For camera specifications and dimensions, please refer to the iBEAM Camera spec sheets.